




HD-Series Super-Duty Four Post Details




Optional Super-Duty Rolling Jacks
Available In
9,000 lb. - 25,000 lb.
Capacities

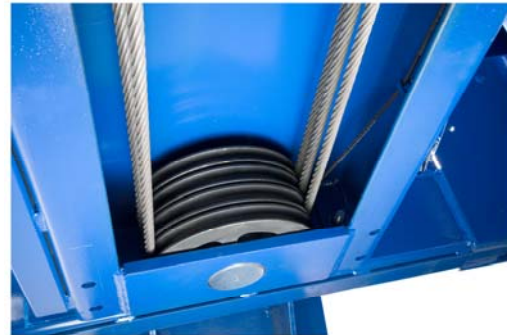

Four-Post Lift
Model(s) HD-18 / HD-27 / HD-27X

- 18,000 and 27,000 pound lifting capacity
- Runways include rail-kit for optional accessories
- Electric/hydraulic power system
- Single hydraulic cylinder mounted underneath runway
- Internal "Anti-Sway" slider blocks in each column
- Features heavy-duty aircraft cable
- Oversized self-lubricating cable rollers
- Rugged 4" main sheave axles

- Multi-position safety locks in each column
- Multi-position , adjustable height safety locks in each column
- Ramps feature non-skid surface
- Push-button safety release
- Runways adjust for different tread widths
- Optional drive-thru ramps available
- Optional 9K, 12K, 15K-pound capacity rolling jacks available
- ETL Approved (Pending)

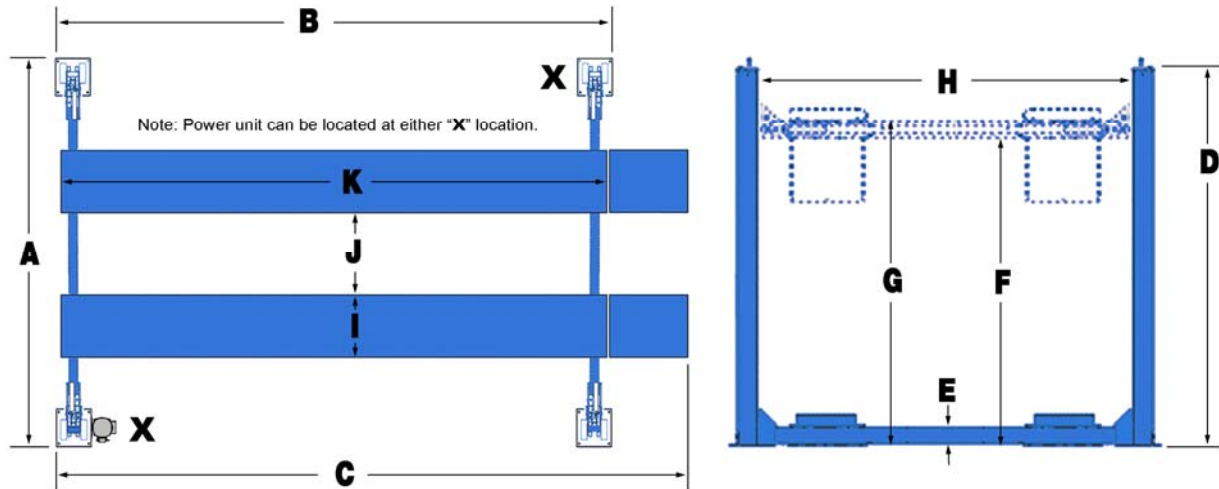

MODEL	HD-18	HD-27	HD-27X
Lifting Capacity*	18,000 lbs. / 8165 Kg.	27,000 lbs. / 12,247 Kg.	27,000 lbs. / 12,247 Kg.
*Max Capacity / Front Axle	9,000 lbs. / 4082 Kg.	13,500 lbs. / 6,124 Kg.	13,500 lbs. / 6,124 Kg.
*Max Capacity / Rear Axle	9,000 lbs. / 4082 Kg.	13,500 lbs. / 6,124 Kg.	13,500 lbs. / 6,124 Kg.
A - Overall Width	154" / 3912 mm.	154" / 3912 mm.	154" / 3912 mm.
B - Outside Length	201" / 5105 mm.	257" / 6528 mm.	317" / 8052 mm.
C - Overall Length	241" / 6121 mm.	297" / 7544 mm.	357" / 9068 mm.
D - Height of Columns	93" / 2362 mm.	93" / 2362 mm.	93" / 2362 mm.
E - Min. Runway Height	8-1/2" / 216 mm.	8-1/2" / 216 mm.	8-1/2" / 216 mm.
F - Max. Rise	60" / 1524 mm.	60" / 1524 mm.	60" / 1524 mm.
G - Max. Lifting Height	68-1/2" / 1740 mm.	68-1/2" / 1740 mm.	68-1/2" / 1740 mm.
H - Width Between Columns	134" / 3404 mm.	134" / 3404 mm.	134" / 3404 mm.
I - Runway Width	22" / 559 mm.	22" / 559 mm.	22" / 559 mm.
J - Width Between Runways (*)	38" - 56"	38" - 56"	38" - 56"
K - Length of Runways	965 mm. - 1422 mm.	965 mm. - 1422 mm.	965 mm. - 1422 mm.
Locking Positions	203" / 5156 mm.	263" / 6680 mm.	323" / 8204 mm.
Lock Spacing	9	9	9
Lifting Time	Every 6" / 152 mm.	Every 6" / 152 mm.	Every 6" / 152 mm.
Lifting Time	75 Seconds	75 Seconds	75 Seconds
Standard Motor (**)	220 VAC / 60 Hz. 1Ph.	220 VAC / 60 Hz. 1Ph.	220 VAC / 60 Hz. 1Ph.

* This dimension may be limited with the addition of rolling jacks. See rolling jack specifications on separate page.

** Special Voltages Available Upon Request

The design, material and specifications are subject to change without notice.